



The Power Supply and Engine Simulation Program

Calculation of Magnetic Flux Density


Dipl.-Ing.(FH) Martin Jacob



Calculation of magnetic flux density

1. Simulation with OpenTrack and OpenPowerNet.
2. Determination of maximum sum catenary current at given position.
3. Calculation of magnetic flux density at the time of maximum sum catenary current.
4. Additional analysis of maximum magnetic flux density at specified point.


OpenPowerNet

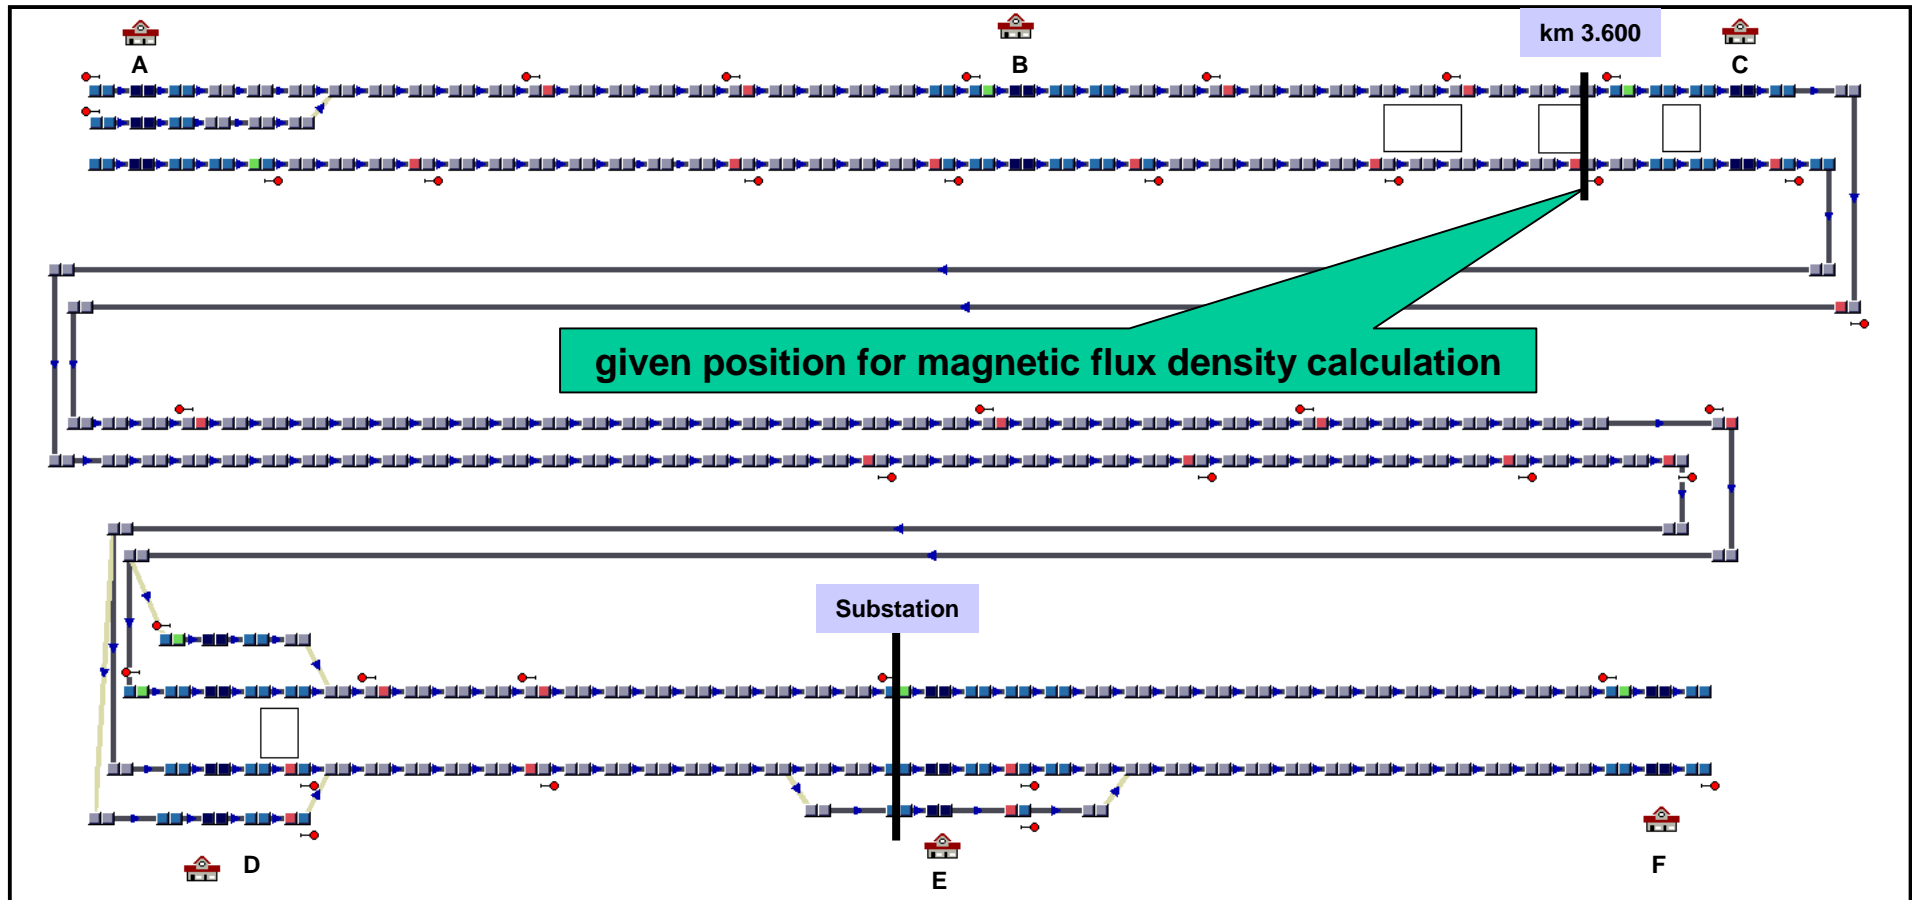

OpenTrack infrastructure

1. Simulation with OpenTrack and OpenPowerNet


sum catenary currents at km 3.6

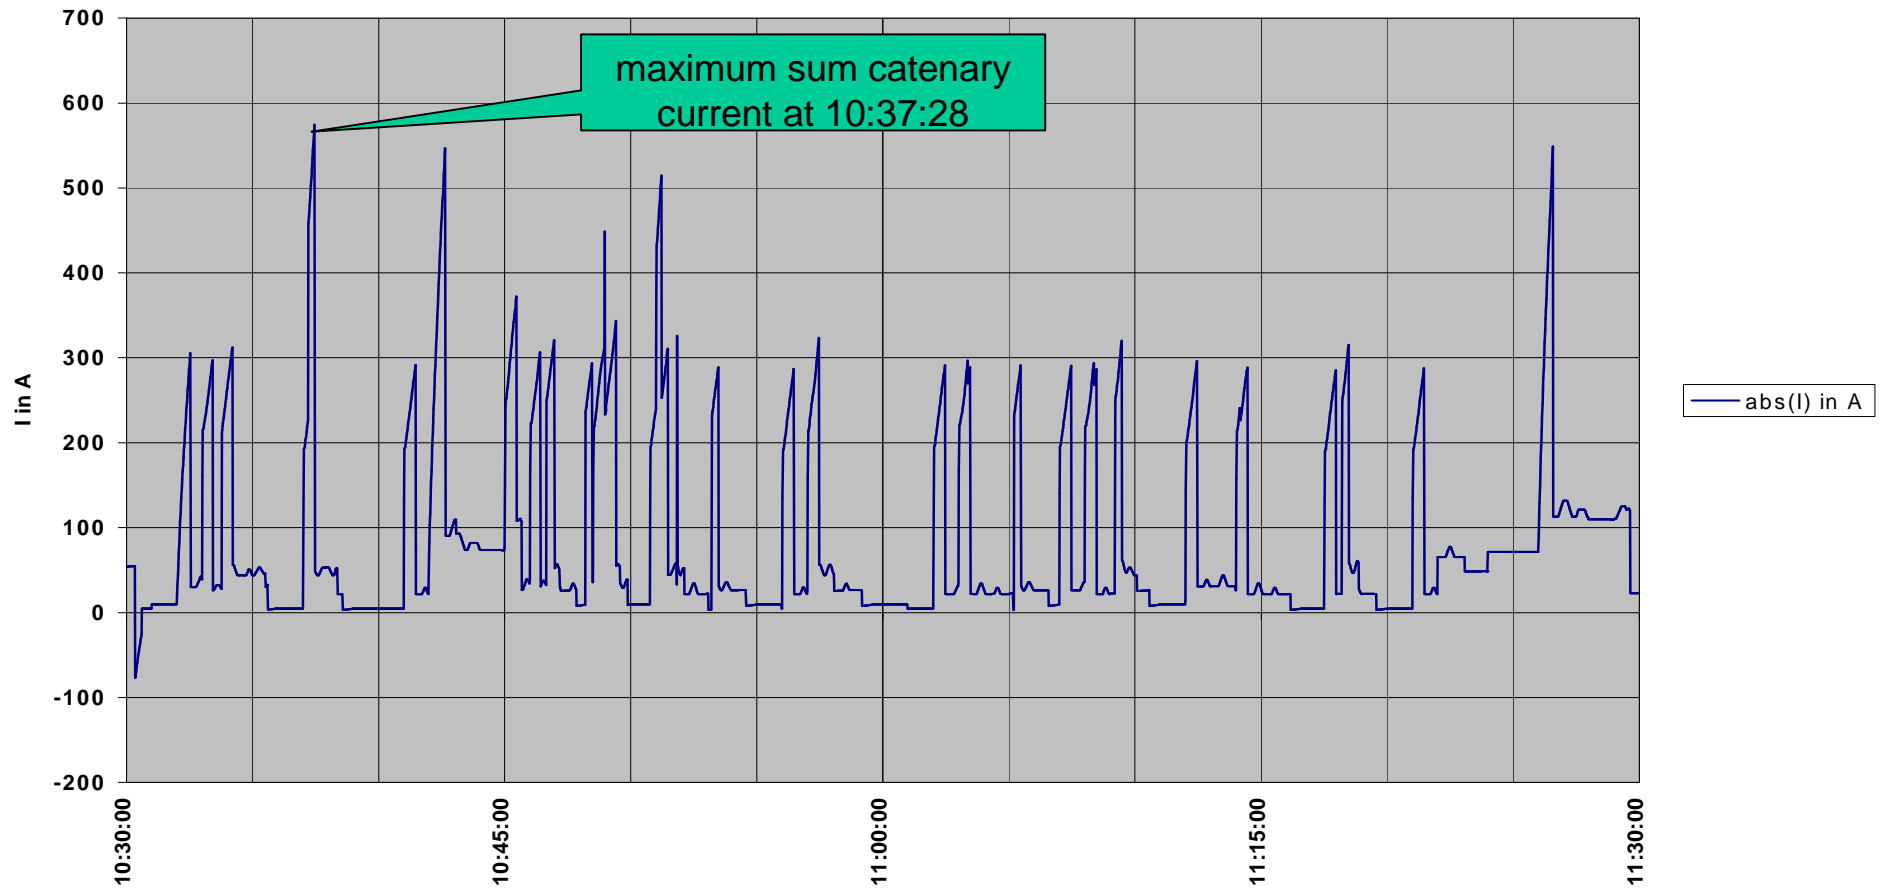


2. Determination of maximum sum catenary current at given position (**km 3.600**)

penPowerNet

Magnetic Flux Density

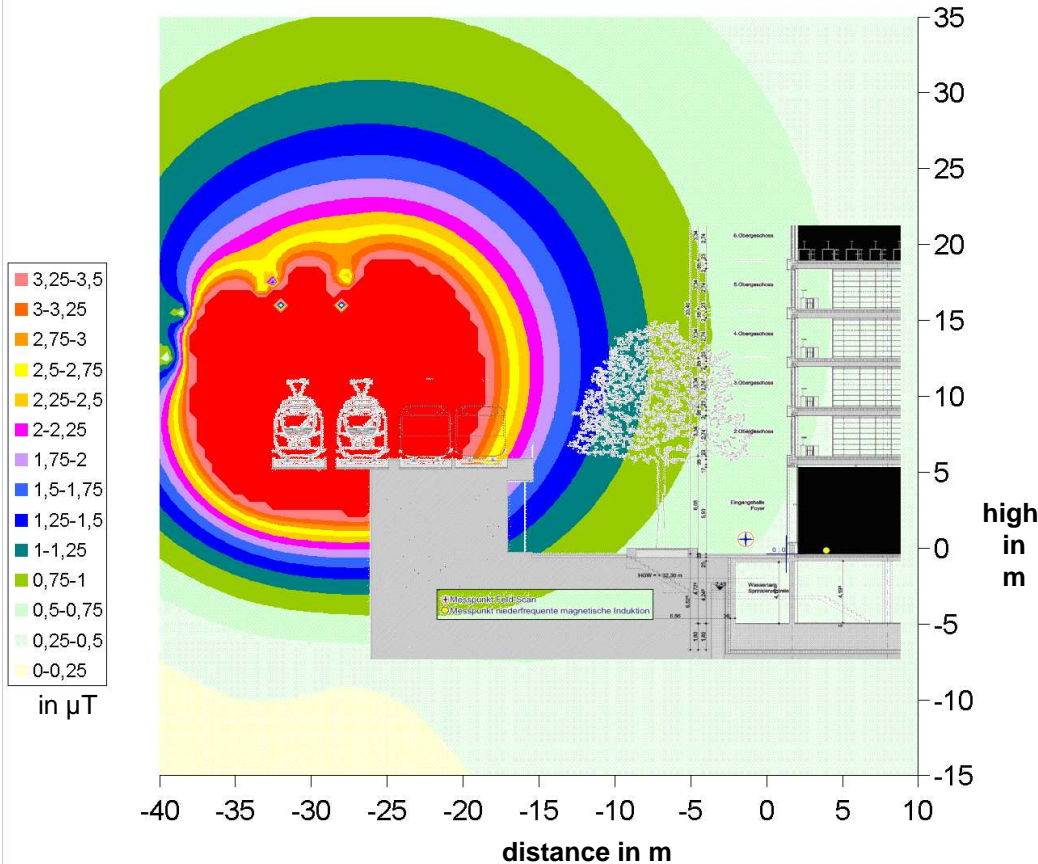

Currents

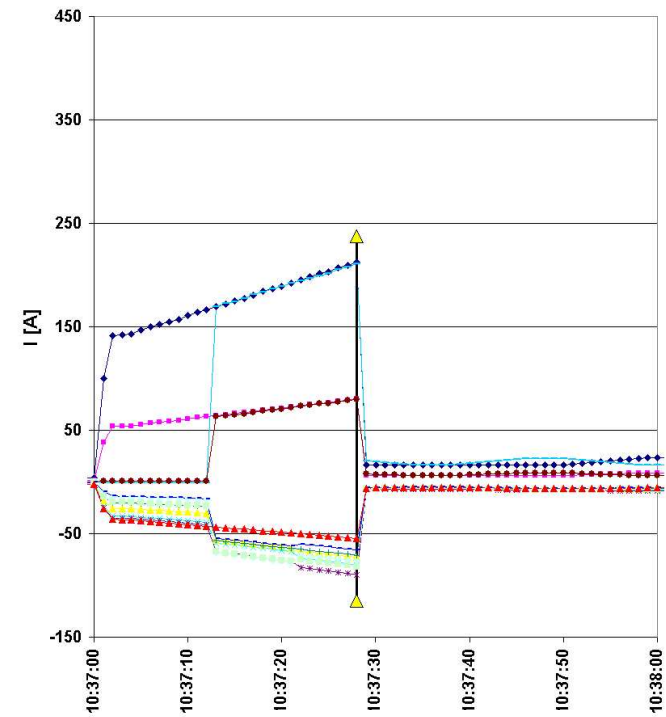

10:37:28 sum catenary currents = 574,45 A

N CW 212,61 A	N MW 80,25 A	N RL -72,66 A	N RR -80,36 A
N RRF -89,72 A	S CW 210,86 A	S MW 79,73 A	S RL -76,64 A
S RR -70,89 A	S RRF1 -81,84 A	S RRF2 -65,51 A	N E -54,43 A


3. Calculation of magnetic flux density at time of maximum sum catenary current at **km 3.600**



Additional analysis of maximum magnetic flux density at specified point


Check of magnetic flux density at each time of current peaks.

sum catenary currents at km 3.6

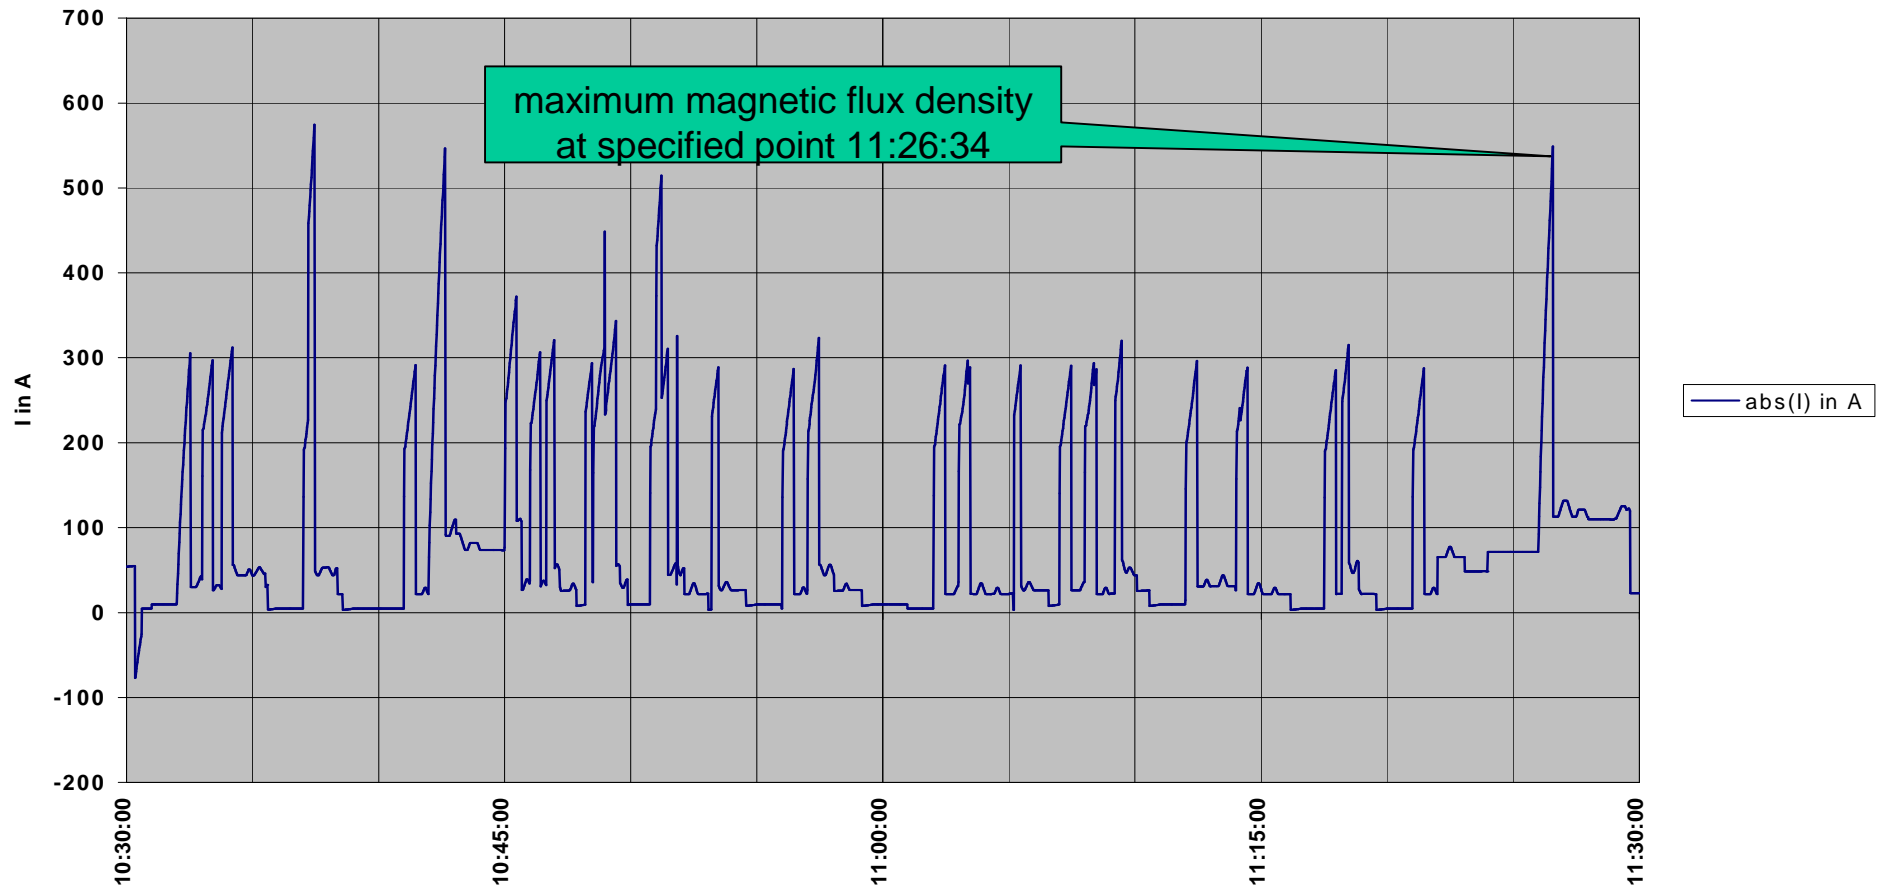

4. Determine time of peak sum catenary current at given position (**km 3.600**)

penPowerNet

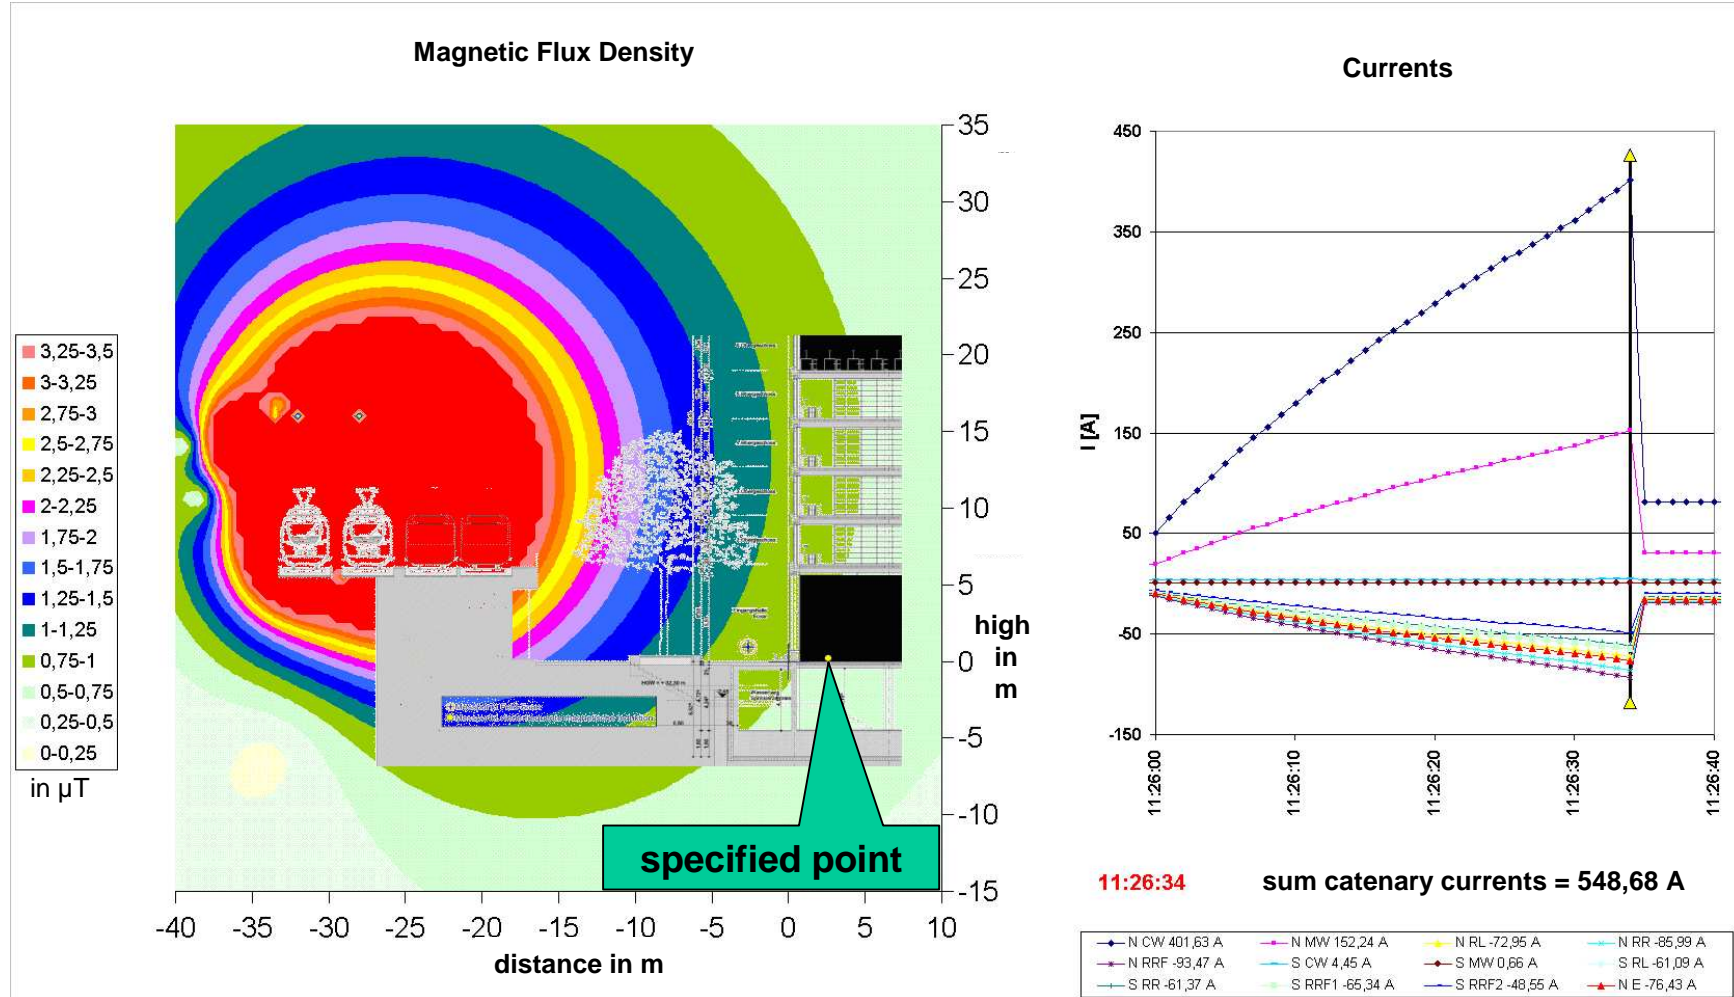

4. Calculation of magnetic flux density at time of peak sum catenary current at **km 3.600**



Simulated magnetic flux density at specified point

	Simulated magnetic flux density in μT
maximum sum current	0.46
maximum value	0.73

- Maximum sum catenary current does not correspond with maximum value of magnetic flux density, caused by complex combinations.
- It is possible to determine the maximum magnetic flux density because of the calculated data by OpenPowerNet.




Verification of calculation results by measurement

by use of scheduled timetable and estimated train characteristics

penPowerNet

Compare Measured and Simulated Currents at Substaion

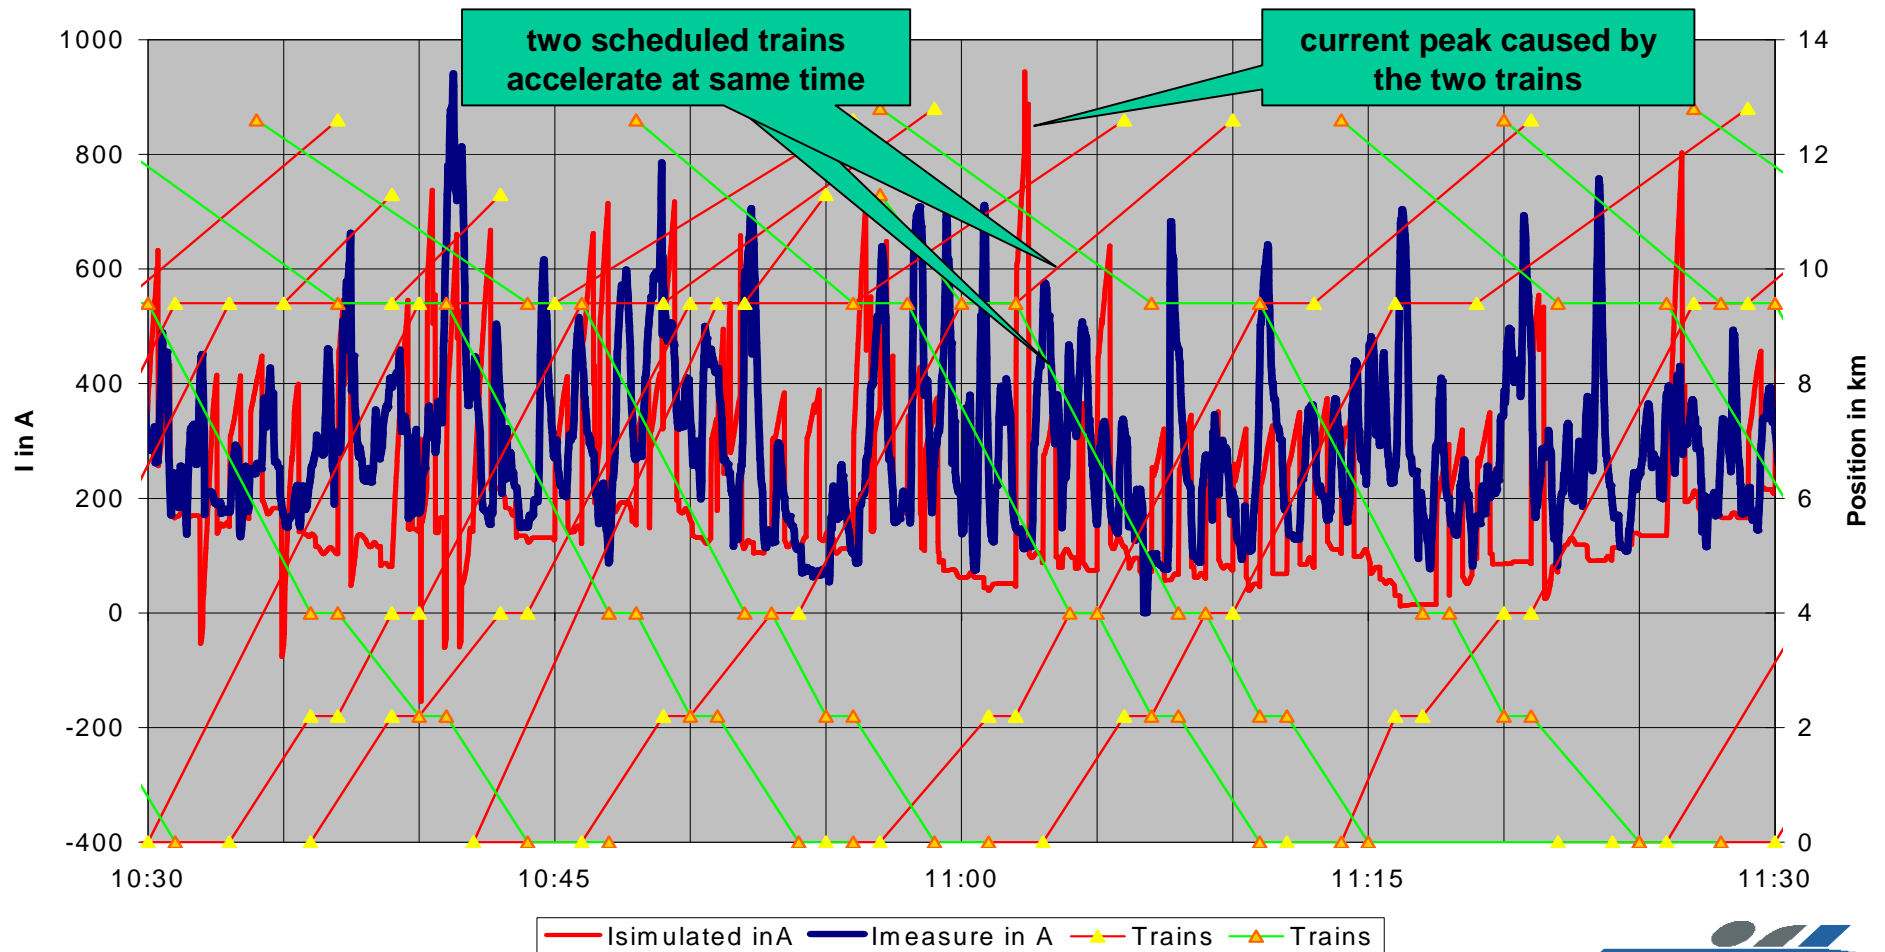

Compare measured and simulated currents at **substation**



OpenPowerNet

Compare Measured and Simulated Currents at Substation

- Different time characteristic because of slightly delayed trains compared with scheduled timetable
- Similarly values of current peaks
- About same base load current
- Same characteristic of measured and simulated currents



OpenPowerNet

Compare maximum measured and simulated magnetic flux density at measuring point

	Measurement	Simulation
maximum magnetic flux density in μT	0.67	0.73

- Good correspondence of measured and simulated maximum values nevertheless the unknown real train dynamics.